

1. Applications:

The TH type cors are used for the inductor of IFT, RF, OSC, Driver, Detector.....etc.

2. Materials:

GL6, GL3B, GL9, GL5E.

3. Ordering code:


GL11 TH 3.2 x 5

Material Type OD H

P	h	h1	r1	r2
0.50±0.03	0.433	0.23 ^{+0.10} _{-0.03}	0.06±0.03	0.15 ⁺⁰
0.60±0.03	0.520	0.28 ^{+0.10} _{-0.03}	0.07±0.03	0.17 ⁺⁰
0.75±0.03	0.650	0.35 ^{+0.10} _{-0.03}	0.08±0.03	0.22 ⁺⁰
1.00±0.03	0.866	0.47 ^{+0.14} _{-0.03}	0.11±0.03	0.29 ⁺⁰



THREADED, DIAGRAM OF OC3 TYPE

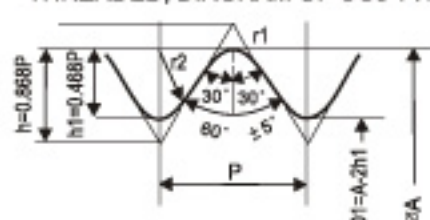

STANDARD TYPE




Fig 1

S4 TYPE




Fig 2

S8 TYPE




Fig 3

S14 TYPE




Fig 4

4. Dimensions (m/m)

ITEM	A	B	C	D	G	Fig
TH 3.2x3 S14	3.2±0.03	3.0±0.2		0.9±0.15		4
TH 3.2x5 S14	3.2±0.03	5.0±0.3		0.9±0.15		4
TH 3.2x6.5 S14	3.2±0.03	6.5±0.3		0.9±0.15		4
TH 3.66x5 S14	3.66±0.03	5.0±0.3		0.85±0.1		4
TH 3.66x6 S14	3.66±0.03	6.0±0.3		0.85±0.1		4
TH 3.66x8 S14	3.66±0.03	8.0±0.3		0.85±0.1		4
TH 5.8x9	5.80±0.03	9.0±0.3	1.25±0.2	2.4±0.15	1.2±0.1	1
TH 5.7x15	5.70±0.03	15.0±0.3	1.25±0.2	2.4±0.15	1.2±0.1	1
TH 6.18x19 S4	6.18±0.03	19.0±0.4	2.7±0.1			2
TH 6.23x19 S4	6.23±0.03	19.0±0.4	2.7±0.1			2
TH 6.23x20 S4	6.23±0.03	20.0±0.4	2.7±0.1			2
TH 6.23x25.4 S4	6.23±0.03	25.4±0.4	2.7±0.1			2