

1. Applications:



On the pc board that pc beads use traces to complete the turns through the bead. And the pc beads offer a choice of one to four circuits from the same bead.

2. Major materials:


GL3B, GL5B, GL6.

3. Ordering code:

Material	Type	A	B	C
GL5B	PCB 6H	7.62	5.08	10

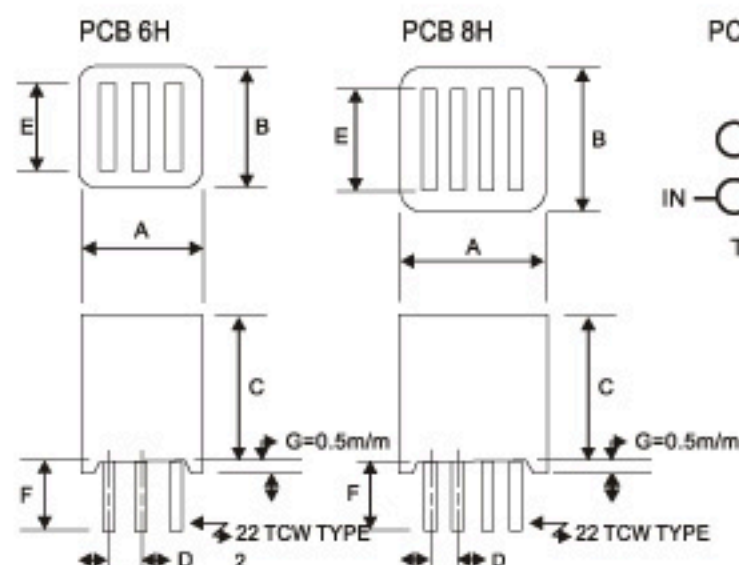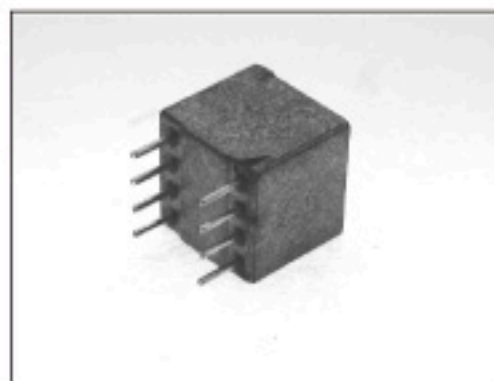

PC Beads Circuit Board Diagrams

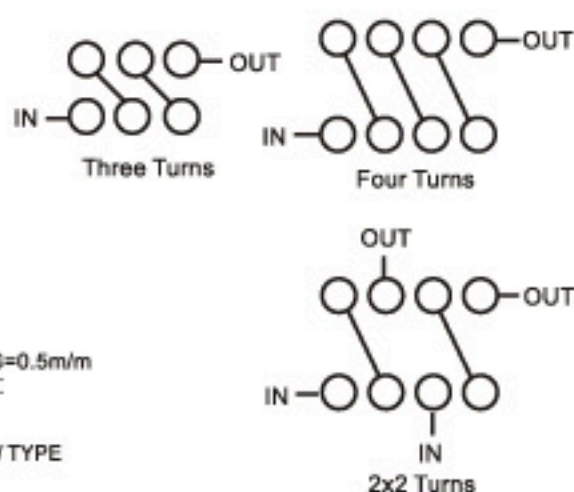

ITEM	Dimensions in mm							Impedance	
	A	B	C	D	E	F		25MHz	100MHz
PCB 6H 7.62x5.08x10	7.62±0.25	5.08±0.25	10±0.25	2.54±0.1	2.54±0.1	3.5±1.0		160	250
PCB 8H 10.88x10.88x6.5	10.88±0.3	10.88±0.25	6.5±0.25	2.54±0.1	7.6±0.2	3.5±1.0		120	200
PCB 8H 10.88x10.88x10	10.88±0.3	10.88±0.25	10±0.25	2.54±0.1	7.6±0.2	3.5±1.0		175	270