


# SMD PC BEAD (6H 8H 10H)(SEP TYPE)


FERRELL

## APPLICATIONS


On the pc board that pc beads use traces to complete the turns through the bead. And the pc Beads offer a choice of one the five circuits from the same bead

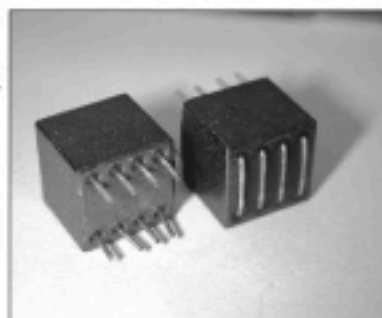

## PRODUCT IDENTIFICATIONS

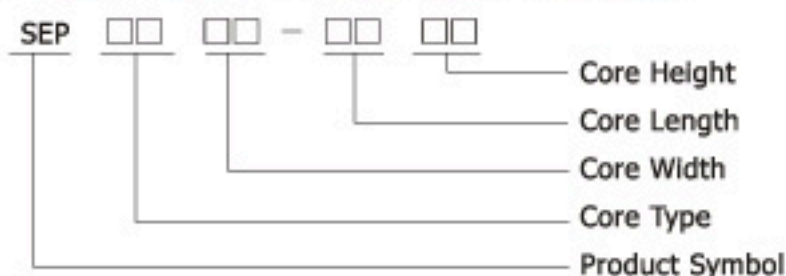

## DIMENSION AND CIRCUIT BOARD DIAGRAMS.

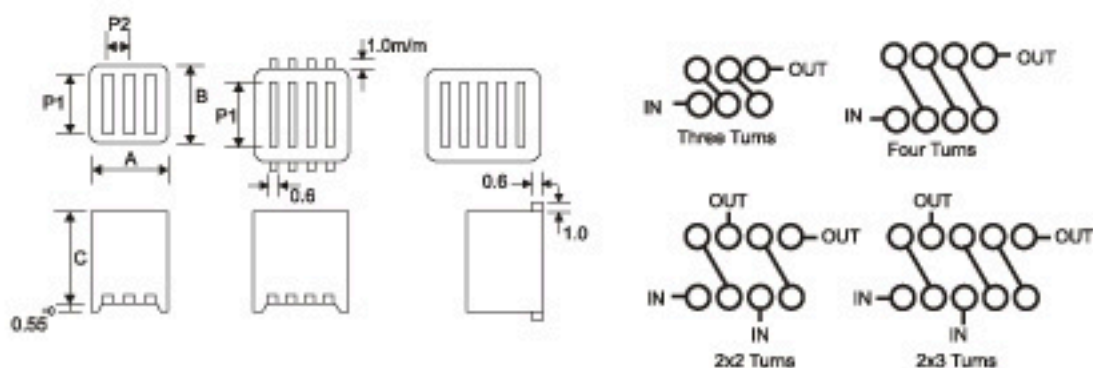

Part Number	A	B	C	P1	P2	Z(Ω)MIN	
						25 MHz	100MHz
SEP8H 11-11	50	10.8±0.25	10.8±0.25	7.62±0.2	2.54±0.2	120	150
	64					130	185
	90					210	260
	106					250	300
SEP5H 11-05	50	10.8±0.25	5.49±0.25	2.54±0.2	2.54±0.2	100	125
	104					208	250
SEP10H 13-11	50	13.4±0.25	10.88±0.25	7.62±0.2	2.54±0.2	125	155
	64					135	190
	90					215	265
	106					255	305
SEP6H 08-11	50	8.34±0.25	10.88±0.25	7.62±0.2	2.54±0.2	100	130
	64					125	160
	106					210	270