



Type: ET Cores

Ordering Code:


GL70

ET28

Material Core Size
材質 規格



Shape:

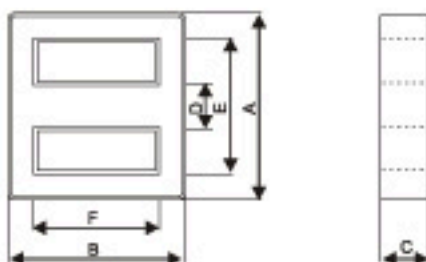

■ Dimensions and effective parameters

CORES	Dimensions in mm						Effective parameters			
	A	B	C	D	E	F	Le(mm)	Ae(mm ²)	Ve(mm ³)	Wt(g)
ET 20	20.10±0.40	20.10±0.40	4.40±0.20	4.00±0.20	15.7min	15.7min	51.2	16.7	855	4.1
ET 24	24.20±0.50	24.20±0.50	4.00±0.20	4.00±0.30	19.00min	19.00min	61.00	17.80	1085	5.24
ET 28	28.40±0.50	28.40±0.50	5.00±0.30	5.00±0.30	22.20min	22.20min	71.40	27.40	1956	9.94
ET 35	35.3±0.7	35.3±0.5	7.5±0.3	7.5±0.3	27.3min	27.3min	87.0	58.0	5050	26.5

■ Electrical characteristics

CORES	AL+25%(nH/N ²)				AL+30%(nH/N ²)
	GL20	GL25	GL50	GL70	GL100
ET 20			2400	3100	
ET 24			1800	2550	3500
ET 28			2400	3350	4900
ET 35			4200	5800	8350

※ AL VALUE: 10KHz, 50mv, 100TS

GAPPED CORE IS AVAILABLE, PLEASE SPECIFY WHEN ORDERING.