

1. Applications:


Balun cores are employed in "balance-unbalance" transformers. Today we find more applications in CATV & MATV networks and installations.

2. Major materials:

GL3B, GL5B, GL6, GL26

3. Ordering code:

GL3A	RID	3 x	3 x	5.2
Material	Type	A	B	C

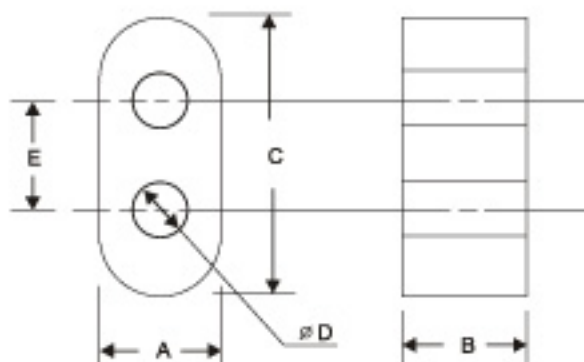

4. Dimensions

ITME	A	B	C	D	E
RID 2.1x2.3x3.5 H0.8	2.10±0.15	2.30±0.20	3.5±0.15	0.8±0.1	1.4
RID 2.1x4.5x3.5 H0.8	2.10±0.15	4.50±0.20	3.5±0.15	0.8±0.1	1.4
RID 2.0x3x5 H1.0	2.0±0.15	3.0±0.2	5.0±0.3	1.0±0.1	
RID 2.6x2.0x5.2 H1.2	2.60±0.15	2.00±0.20	5.2±0.30	1.2±0.1	2.5
RID 2.3x5.5x7.5 H0.8	2.30±0.15	5.50±0.20	7.5±0.30	0.8±0.1	5.08
RID 2.3x7.5x7.5 H0.8	2.30±0.15	7.50±0.20	7.5±0.30	0.8±0.1	5.08
RID 3.0x2.0x5.2 H1.2	3.00±0.15	2.00±0.20	5.2±0.30	1.2±0.1	2.6
RID 3.0x2.0x5.0 H1.2	3.00±0.15	2.00±0.20	5.0±0.15	1.2±0.1	2.0
RID 3.0x3.0x5.0 H1.2	3.00±0.15	3.00±0.20	5.0±0.30	1.2±0.1	2.0
RID 3.0x2.0x6.5 H1.0	3.00±0.15	2.00±0.20	6.50±0.30	1.0±0.1	3.5
RID 3.0x3.0x6.5 H1.0	3.00±0.15	3.00±0.20	6.5±0.30	1.0±0.1	3.5
RID 3.0x3.5x6.0 H1.5	3.00±0.15	3.50±0.20	6.0±0.30	1.5±0.1	3.0
RID 4.0x3.2x7.0 H1.8	4.00±0.20	3.20±0.20	7.0±0.30	1.8±0.1	2.8
RID 4.0x6.5x7.0 H1.8	4.00±0.20	6.50±0.20	7.0±0.30	1.8±0.1	2.8
RID 7.5x14x13.5 H4.0	7.50±0.20	14.0±0.30	13.5±0.30	4.0±0.2	6.10
RID 7.5x28x13.5 H4.0	7.50±0.20	28.0±0.70	13.5±0.30	4.0±0.2	6.10