



Type: UT Cores


Ordering Code:

GL70


UT20

Material
材質

Core Size
規格

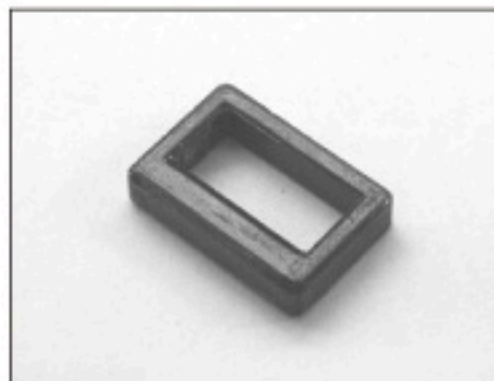

Shape:

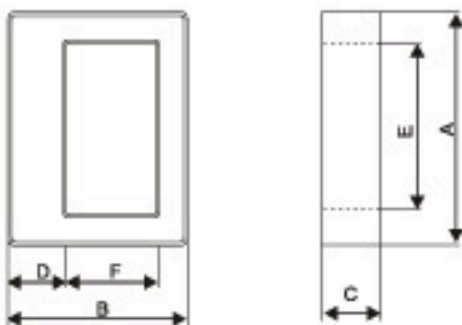

■ Dimensions and effective parameters

CORES	Dimensions in mm						Effective parameters				
	A	B	C	D	E	F	C1(mm ³)	Le(mm)	Ae(mm ²)	Ve(mm ³)	Wt(g)
UT20	20.80±0.30	14.10±0.25	4.60±0.20	4.10±0.20	15.70min	7.35min	4.11	53	13	668	3.65
UT25	25.60±0.40	17.60±0.30	5.20±0.25	3.40±0.15	19.30min	8.70min	3.77	68	18	1203	6.30
UT30	30.00±0.40	19.80±0.30	6.40±0.25	4.20±0.15	22.40min	8.90min	2.85	77	27	2068	11.00

■ Electrical characteristics

CORES	AL±25%(nH/N ²)				AL±30%(nH/N ²)
	GL20	GL25	GL50	GL70	GL100
UT20			1528	2140	3000
UT25				2350	
UT30				3150	

※ AL VALUE: 10KHz, 50mv, 100TS

GAPPED CORE IS AVAILABLE, PLEASE SPECIFY WHEN ORDERING.