




# Type: PQ Cores

Ordering Code:

**GL25**      **PQ20/20**      **G□**  
 Material    Core Size    AL Value  
 材質        規格        感量



Shape:

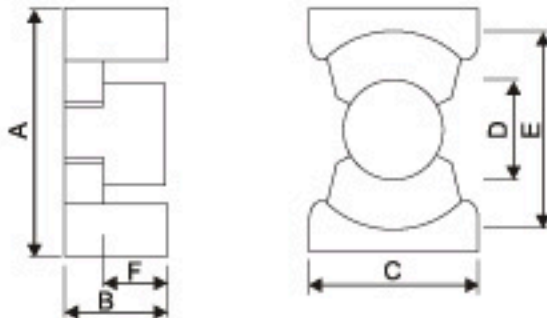

## ■ Dimensions and effective parameters

CORES	Dimensions in mm						Effective parameters					
	A	B	C	D	E	F	I	C1(mm <sup>3</sup> )	Le(mm)	Ae(mm <sup>2</sup> )	Ve(mm <sup>3</sup> )	Wt(g)
PQ 20/16	21.30±0.40	8.10±0.20	14.00±0.40	8.80±0.20	18.00±0.40	5.15±0.15		0.605	37.4	62.0	2310	11.00
PQ 20/20	21.30±0.40	10.10±0.20	14.00±0.40	8.80±0.20	18.00±0.40	7.15±0.15		0.738	45.4	62.0	2790	14.00
PQ 26/20	27.40±0.45	10.15±0.25	18.90±0.45	11.90±0.20	22.50±0.45	5.85±0.15		0.391	46.3	119	5490	31.00
PQ 26/25	27.40±0.45	12.50±0.25	18.90±0.45	11.90±0.20	22.50±0.45	8.20±0.15		0.472	55.5	118	6530	36.00

## ■ Electrical characteristics

CORES	AL±25%(nH/N <sup>2</sup> )				AL±30%(nH/N <sup>2</sup> )
	GL20	GL25	GL50	GL70	GL100
PQ 20/16		3520			
PQ 20/20		2820			
PQ 26/20		5500			
PQ 26/25		4500			

※ AL VALUE: 10KHz, 50mv, 100TS

GAPPED CORE IS AVAILABLE, PLEASE SPECIFY WHEN ORDERING.