


FERRITE LINE FILTER (FL-3 TYPE)

FERRITE


ORDERING CODE:

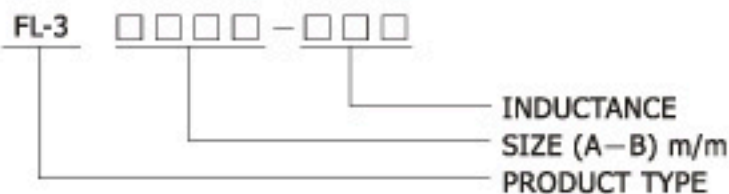

ELECTRICAL CHARACTERISTICS:

The FL-3 type can be designed by size, impedance, inductance.

SHAPE

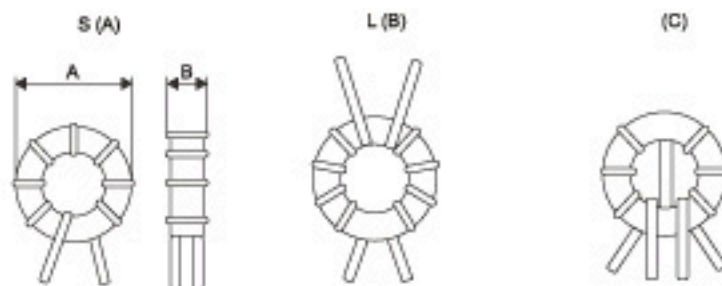

STANDARD PRODUCT CHARACTERISTICS:

PART NO	INDUCTANCE (mH)	DC RESISTANCE (Ω)max	IMPEDANCE (Ω)min	WIRE (m/m)	Fig
FL-3- 1306-201	0.20	0.015	500/1MHZ	0.6	A
FL-3- 1308-300	0.03	0.001	100/1MHZ	0.85	A
FL-3- 1308-101	0.10	0.015	300/1MHZ	0.7	A
FL-3- 1406-452	4.50	0.500	20K/500KHZ	0.2	A
FL-3- 1506-501	0.50	0.050	2500/1MHZ	0.4	A
FL-3- 1607-201	0.20	0.020	800/1MHZ	0.5	A
FL-3- 1607-301	0.30	0.020	1300/1MHZ	0.6	A
FL-3- 1708-121	0.12	0.030	2000/10MHZ	0.5	B
FL-3- 1708-501	0.50	0.030	2000/2MHZ	0.5	B
FL-3- 1810-211	0.21 \pm 40%	0.050	2200/1MHZ	0.5	B
FL-3- 1811-352	3.50	0.100	5000/200MHZ	0.5	C
FL-3- 1811-702	7.00	0.200	10K/200KHZ	0.45	C
FL-3- 1811-153	15.00	0.300	30K/160KHZ	0.4	C
FL-3- 2010-651	0.65	-	2000/2MHZ	0.9	B
FL-3- 2011-802	8.00	0.150	15K/200KHZ	0.5	C
FL-3- 2214-332	3.30	0.150	30K/400KHZ	0.5	C
FL-3- 3017-302	3.00	0.100	3500/500KHZ	0.7	C
FL-3- 3120-603	60.00	0.220	30K/50KHZ	0.7	C