



FERRITE LINE FILTER (FL-4 TYPE)

FERRITE


ORDERING CODE:

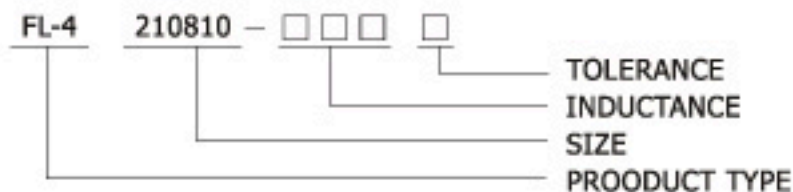

CONFIGURATION & DIMENSION: m/m

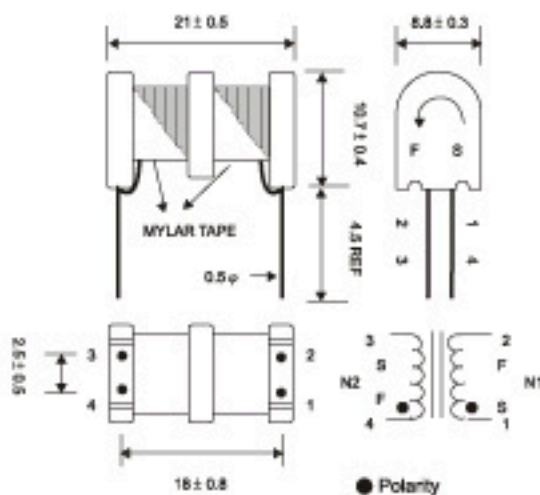

DSL FILTER SCHEMATIC

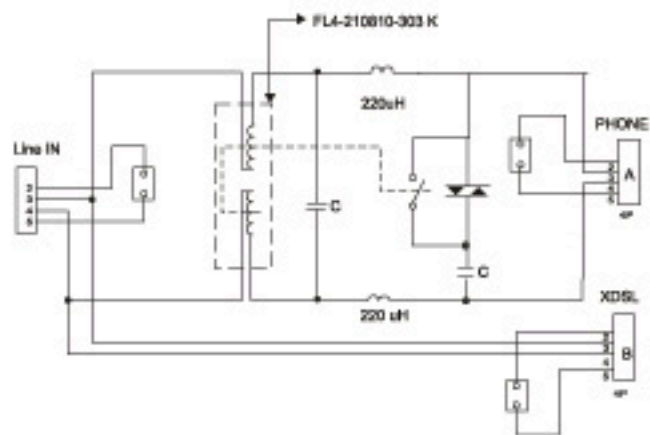

- FOR DSL FILTER OR OTHER COMMUNICATION FILTER
- WITH STAND VOLTAGE: 1.0 KVDC (WINDING TO WINDING)
- INSULATION RESISTANCE: 100MΩ MIN, AT 500VDC (WINDING TO CORE)

STANDARD PRODUCT CHARACTERISTICS:

PART NO	INDUCTANCE (mH) PIN(1-3)	INDUCTANCE(mH) Typical		DC RESISTANCE (Ω)max PIN(1-3)	REEL SWITCH ACTIVE CURRENT
		DC60mA	DC100mA		
FL-4- 210810-203K	20.0	19.8	19.5	20.0	<50mA
FL-4- 210810-303K	30.0	29.3	28.7	24.0	<45mA
FL-4- 210810-353K	35.0	34.5	33.6	32.0	<45mA
FL-4- 210810-403K	40.0	38.3	34.0	32.0	<40mA

PIN(2,4)-SHORT
TOLERANCE(J:±5%, K:±10%)