



DLW21H SERIES

FERRE

FEATURES

1. Small size and low profile (2.0x1.2x0.9mm).
Excellent noise suppression for sets of small and thin size.
2. High common mode impedance at high frequency effects excellent noise suppression performance.
3. Various common mode impedance from 67 to 180 ohm can be used, selected depending on noise level and signal frequency.
4. Suitable for differential signal line like USB2.0, IEEE1394 and LVDS, because DLW21H does not provide distortion to high speed signal transmission due to its high coupling. (USB2.0:DLW21HN900SQ2)
5. Lead is not contained in the product.
6. Small dimension enables higher density mounting.

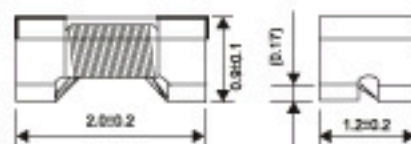

(In mm)

APPLICATIONS

Common mode noise suppression of signal lines in high speed and high density digital equipment such as personal computers and peripherals and telecommunication equipment.

Part Number	Common Mode Impedance (at 100MHz, 20 degree C) (ohm)	Rated Current (mA)	Rated Voltage (Vdc)	Insulation Resistance (M ohm)	Withstand Voltage (Vdc)	DC Resistance (ohm)
DLW21HN670SQ2	67(Typ.)	330	50	10 min	125	0.35 max.
DLW21HN900SQ2	90(Typ.)	330	50	10 min	125	0.35 max.
DLW21HN121SQ2	120(Typ.)	280	50	10 min	125	0.45 max.
DLW21HN181SQ2	180(Typ.)	250	50	10 min	125	0.50 max.

Operating Temperature Range:-40°C to 85°C