





FERRITE LINE FILTER (FL-2 TYPE)

Ferrite


ORDERING CODE:

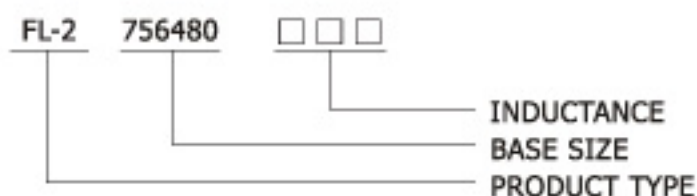

DIMENSIONS (unit: mm)



SCHEMATIC

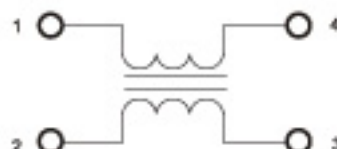

ELECTRICAL CHARACTERISTICS

PART NO	INDUCTANCE (μ H)	IMPEDANCE Ω -min@100MHz	DC RESISTANCE (Ω)Max	RATED CURRENT (mA)
FL-2 756480-5R6	$5.6 \pm 50\%$	200	0.030	500
FL-2 756480-150	$15.0 \pm 35\%$	380	0.035	500
FL-2 756480-400	$40.0 \pm 35\%$	800	0.040	500
FL-2 756480-600	$60.0 \pm 35\%$	900	0.045	500
FL-2 756480-800	$80.0 \pm 35\%$	1200	0.050	500

*Operating temperature range----- -25°C to $+70^{\circ}\text{C}$

*Rated voltage----- 50V

*Withstand voltage----- DC 200V(between line to cover)

*Insulation resistance----- DC 110V/10M Ω MIN(between line to cover)