

Type: UU Cores

Ordering Code:

GL70


UU10.5

Material
材質

Core Size
規格



Shape:

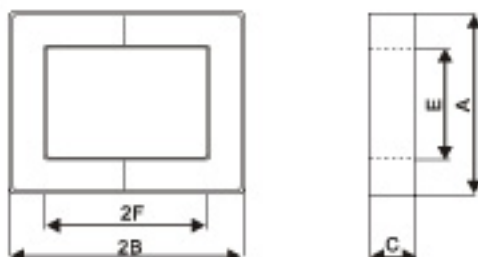

■ Dimensions and effective parameters

CORES	Dimensions in mm					Effective parameters				
	A	B	C	E	F	C1(mm ³)	Le(mm)	Ae(mm ²)	Ve(mm ³)	Wt(g)
UU9.8	9.80±0.20	7.20±0.10	2.70±0.20	4.20min	4.20±0.20	4.30	34	8	271	1.40
UU10.5	10.50±0.25	8.00±0.30	5.00±0.15	5.35min	5.30±0.30	3.14	40	13	518	2.64
UU15	15.20±0.70	11.40±0.50	6.45±0.25	4.90min	6.25±0.35	1.58	51	33	1673	8.26
UU15.7	15.70±0.30	9.90±0.30	6.00±0.20	6.50min	6.10±0.25	1.98	50	25	1278	6.86
UU16	16.00±0.30	10.00±0.20	6.00±0.15	6.70min	6.00±0.15	1.93	52	27	1381	7.24

■ Electrical characteristics

CORES	AL±25%(nH/N ²)				AL±30%(nH/N ²)
	GL20	GL25	GL50	GL70	GL100
UU9.8			900	1200	1600
UU10.5			1220	1650	2800
UU15			2680	3320	
UU15.7			2120	2620	
UU16			2140	2720	5710

※ AL VALUE: 10KHz, 50mv, 100TS

GAPPED CORE IS AVAILABLE, PLEASE SPECIFY WHEN ORDERING.