

1. Applications:



The tapping beads are convenient for the automatic insertion in the pc boards.

2. Materials:


GL3B, GL5, GL5B, GL6.

3. Ordering code:

$\frac{\text{GL5B}}{\text{Material}}$
 $\frac{\text{RHW}}{\text{Type}}$
 $\frac{3.5}{\text{OD}}$
 $\frac{\text{X } 6}{\text{H}}$
 $\frac{\text{X } 0.8}{\text{ID}}$

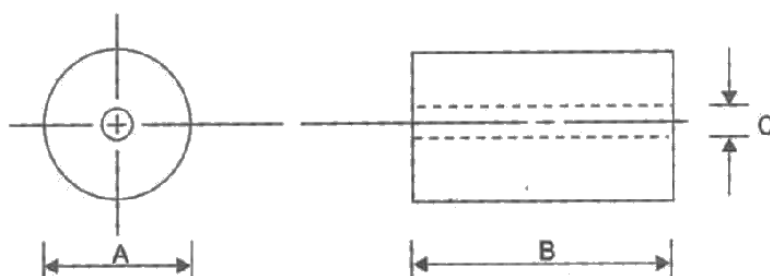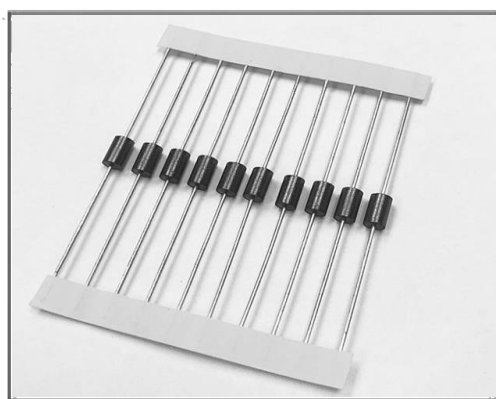

4. Tapping type

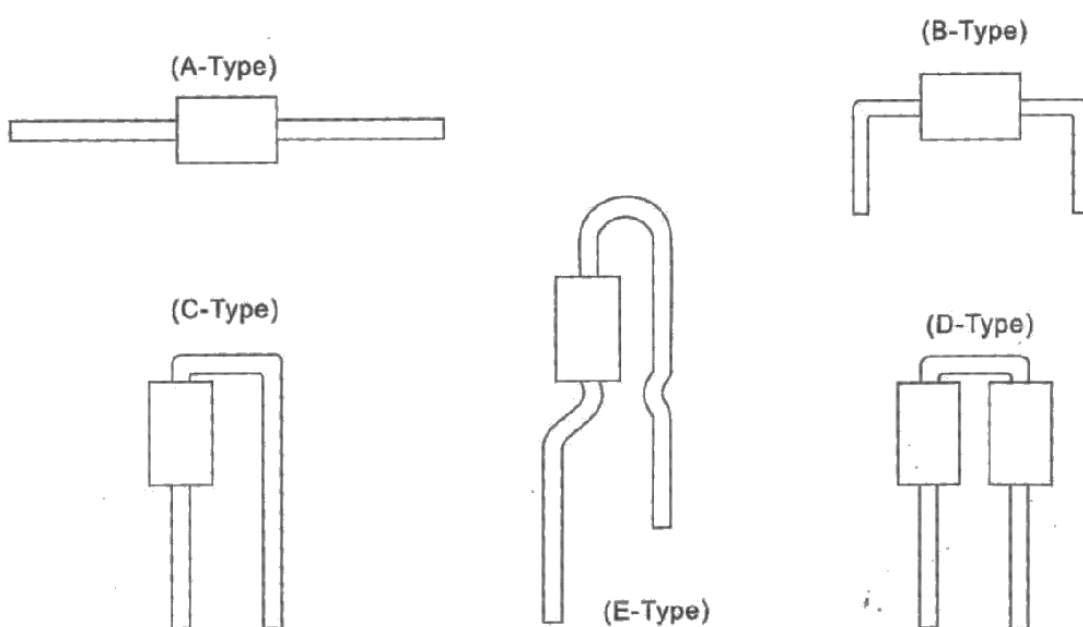

5. Dimensions (m/m)

ITEM	A m/m	B m/m	C m/m	IMPEDANCE(OHM)	
				25MHz Min	100MHz Min
RHW 2.5x3.0x0.8	2.5±0.15	3.0±0.3	0.8±0.1	15	35
RHW 2.5x4.0x0.8	2.5±0.15	4.0±0.3	0.8±0.1	20	40
RHW 2.5x5.0x0.8	2.5±0.15	5.0±0.3	0.8±0.1	25	50
RHW 3.5x3.0x0.8	3.5±0.15	3.0±0.3	0.8±0.1	20	40
RHW 3.5x4.5x0.8	3.5±0.15	4.5±0.3	0.8±0.1	35	60
RHW 3.5x4.7x0.8	3.5±0.15	4.7±0.3	0.8±0.1	35	60
RHW 3.5x6.0x0.8	3.5±0.15	6.0±0.3	0.8±0.1	40	80
RHW 3.5x7.5x0.8	3.5±0.15	7.5±0.3	0.8±0.1	50	90
RHW 3.5x8.3x0.8	3.5±0.15	8.3±0.3	0.8±0.1	65	110
RHW 3.5x9.0x0.8	3.5±0.15	9.0±0.3	0.8±0.1	70	110
RHW 3.5x3.2x1.6	3.5±0.15	3.2±0.3	1.6±0.15	13	30
RHW 3.5x4.0x2.0	3.5±0.15	4.0±0.3	2.0±0.15	15	35
RHW 3.5x6.0x1.5	3.5±0.15	6.0±0.3	1.5±0.15	30	50

