



Type: EP Cores

Ordering Code:

GL100 EP7 G□
 Material Core Size AL Value
 材質 規格 感量

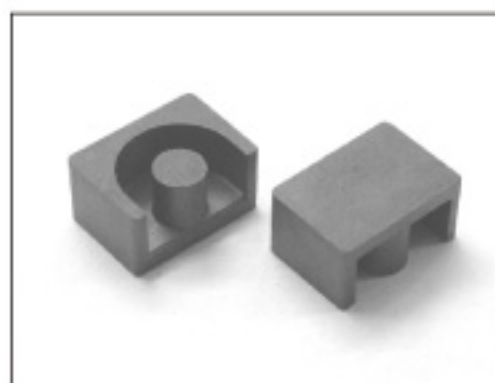

Shape:

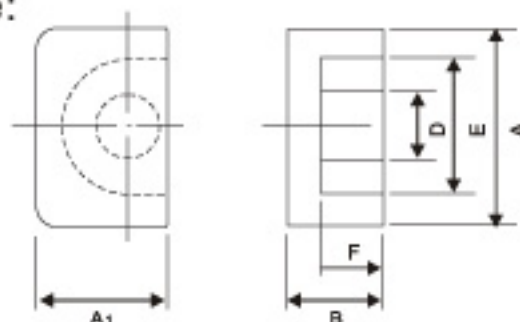

■ Dimensions and effective parameters

CORES	Dimensions in mm						Effective parameters				
	A	A ₁	B	D	E	F	C _l (mm ³)	Le(mm)	Ae(mm ²)	Ve(mm ³)	Wt(g)
EP 7	9.20±0.20	8.35±0.15	3.75 ^{+0.05} _{-0.10}	3.30±0.10	7.40±0.20	2.80±0.10	1.52	15.7	10.3	162	1.40
EP 10	11.50±0.30	7.65±0.20	5.20 ^{+0.05} _{-0.10}	3.30±0.15	9.40±0.20	3.70±0.10	1.70	19.2	11.3	217	2.80
EP 13	12.50±0.30	8.80±0.20	6.50 ^{+0.05} _{-0.10}	4.35±0.15	10.00±0.30	4.80±0.10	1.24	24.2	19.5	472	4.50

■ Electrical characteristics

CORES	AL±25%(nH/N ²)				AL±30%(nH/N ²)
	GL20	GL28	GL50	GL70	GL100
EP 7		1100	2000	3600	5200
EP 10		1000	2000	3400	4800
EP 13		1600	2800	4400	7000

※ AL VALUE: 10KHz, 50mv, 100TS

GAPPED CORE IS AVAILABLE, PLEASE SPECIFY WHEN ORDERING.