



Fervie

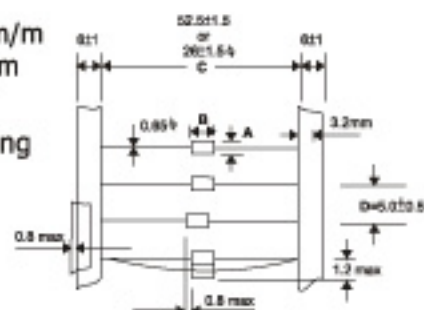

PART NO	A	B	IMPEDANCE (Ω)25MHz	IMPEDANCE (Ω)100MHz
ES25040-□□□	2.5 ± 0.2	4.0 ± 0.3	36	51
ES35030-□□□	3.5 ± 0.2	3.0 ± 0.3	36	57
ES35045-□□□	3.5 ± 0.2	4.5 ± 0.3	54	80
ES35047-□□□	3.5 ± 0.2	4.7 ± 0.3	56	83
ES35060-□□□	3.5 ± 0.2	6.0 ± 0.3	65	100
ES35075-□□□	3.5 ± 0.2	7.5 ± 0.3	81	124
ES35080-□□□	3.5 ± 0.2	8.0 ± 0.3	86	133
ES35083-□□□	3.5 ± 0.2	8.3 ± 0.3	90	135
ES35090-□□□	3.5 ± 0.2	9.0 ± 0.3	98	140
ES35120-□□□	3.5 ± 0.2	12.0 ± 0.4	130	186
ES35140-□□□	3.5 ± 0.2	14.0 ± 0.4	152	220

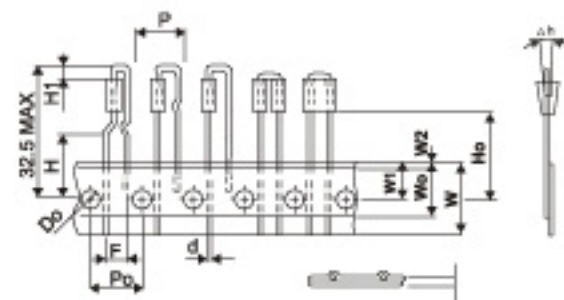


Symbol	Dim.(m/m)	Symbol	Dim.(m/m)
P	12.7 ± 1.0	H1	3.0(max)
Po	12.7 ± 0.3	W	$18.0 \pm 1.0 - 0.5$
d	0.65 or 0.52	Wo	12.5(min)
F	5.0 ± 0.8	W1	9.0 ± 0.8
Do	4.0 ± 0.3	W2	1.0(max)
H	16.0 ± 1.0	t	0.7 ± 0.3
Ho	18.5 ± 1.0	Δh	0.0 ± 1.0

SPECIFICATION FOR APPROVAL

CUSTOMER		ISSUE NO.	
PART NO.	GL5B RIDW 236050-T	ISSUE DATE	MAY.26.2011
DESCRIPTION		REV.	00

1. CONFIGURATION & DIMENSION:m/m

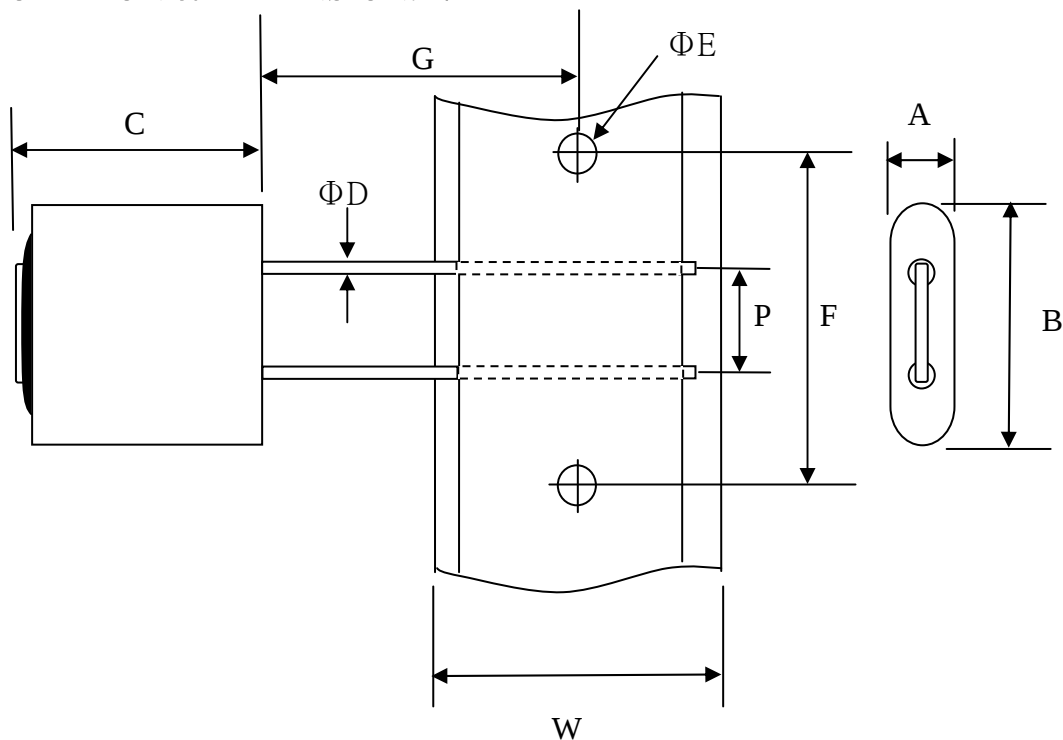

A	B	C	ΦD	ΦE	F	G	P	W
2.3±0.2	6.5 max	7.0 max	0.6	4.0±0.2	12.7±0.3	18.5 ref	2.5±0.5	18.0+1/-0.5

2.ELECTRICAL CHARACTER:(HP4286A)

ITEM	SPEC	CONDITON
1. IMPEDANCE	30Ω MIN	5~300MHZ
2. IMPEDANCE	50Ω MIN	15~300MHZ
3.WINDING TURNS	TC 0.60Φ * 1TS	




BIPOLAR ELECTRONIC CO., LTD.
 桃園市文中路 747 號 5 樓
 TEL: 886-3-3608892 FAX:886-3-3608864
 E-mail: bipolar.betty@msa.hinet.net

APP.	CHECK	DRAWN
JACK	ALAN	BETTY

SPECIFICATION FOR APPROVAL

CUSTOMER		ISSUE NO.	
PART NO.	GL5B RIDW 236050-T	ISSUE DATE	MAY.26.2011
DESCRIPTION			TC 0.600 * 1 TS .

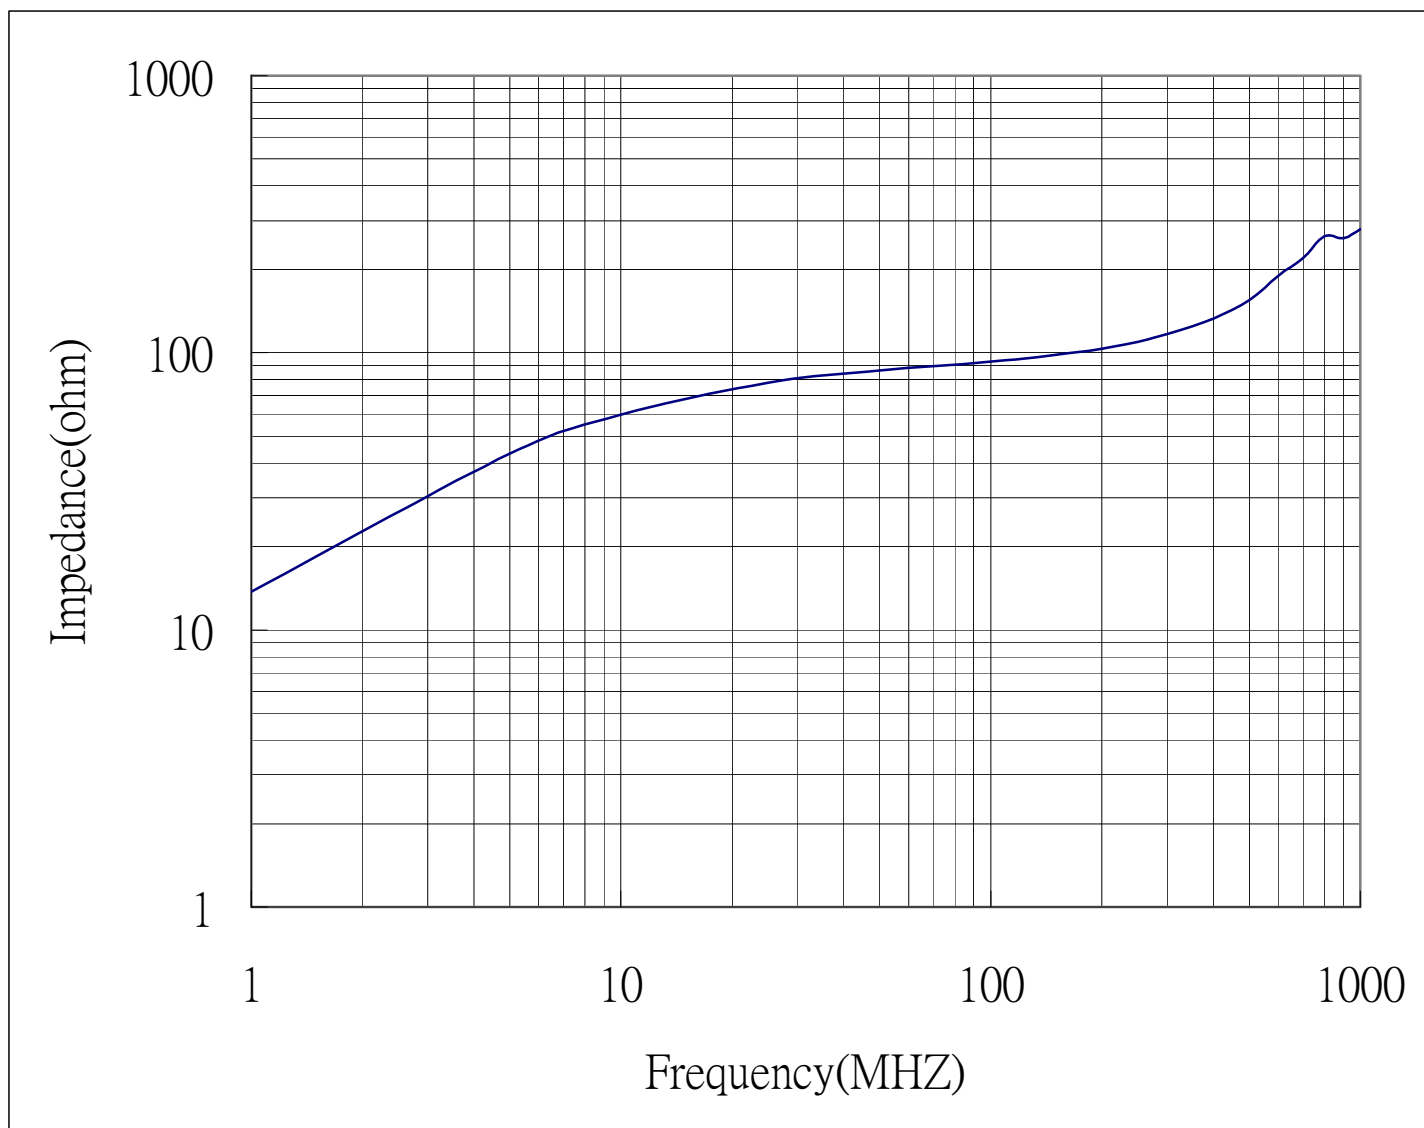

 BIPOLAR ELECTRONIC CO., LTD. 桃園市文中路 747 號 5 樓 TEL: 886-3-3608892 FAX:886-3-3608864 E-mail: bipolar.betty@msa.hinet.net	APP.	CHECK	DRAWN
	JACK	ALAN	BETTY