

Type: EF Cores

Ordering Code:

GL25

EF16

G□

Material

材質


Core Size

規格

AL Value

感量

Shape:

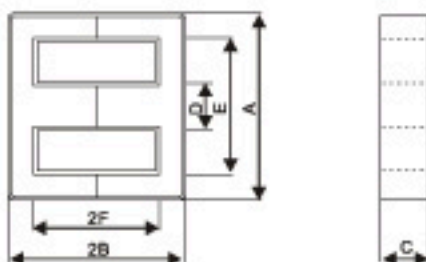

■ Dimensions and effective parameters

CORES	Dimensions in mm						Effective parameters				
	A	B	C	D	E	F	C1(mm ³)	Le(mm)	Ae(mm ²)	Ve(mm ³)	Wt(g)
EF 12.6	12.65±0.45	6.40±0.10	3.55±0.15	3.55±0.15	8.90min	4.65±0.15	2.391	29.70	12.40	370	1.86
EF 16	16.1±0.60	8.05±0.15	4.50±0.20	4.55±0.15	11.30min	5.90±0.20	1.870	37.60	20.10	754	4.10
EF 20	20.00±0.40	10.00±0.20	6.00±0.20	5.80±0.20	14.10min	7.40±0.20	1.426	46.80	32.80	1536	7.70
EF 25	25.05±0.75	12.55±0.25	7.20±0.30	7.25±0.25	17.50min	8.95±0.25	1.110	57.80	51.80	2990	14.91
EF 25/25/11	25.05±0.75	12.55±0.25	10.70±0.30	7.25±0.25	17.50min	8.95±0.25	0.771	58.00	75.10	4356	22.27

■ Electrical characteristics

CORES	AL±25%(nH/N ²)				AL±30%(nH/N ²) GL100
	GL20	GL25	GL50	GL70	
EF 12.6		810			
EF 16		1100			
EF 20		1750			
EF 25		2100			
EF 25/25/11		3000			

※ AL VALUE: 10KHz, 50mv, 100TS

GAPPED CORE IS AVAILABLE, PLEASE SPECIFY WHEN ORDERING.