
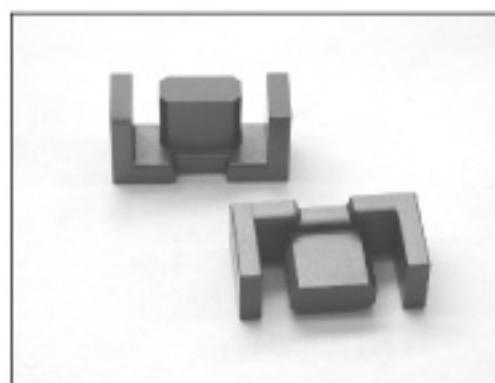


Type: EFD Cores

Ordering Code:

GL25 **EFD25** **G□**
 Material Core Size AL Value
 材質 規格 感量

Shape:

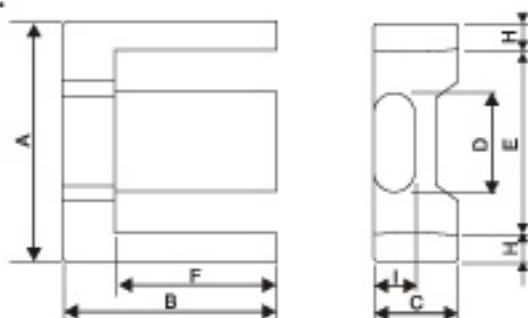

■ Dimensions and effective parameters

CORES	Dimensions in mm							Effective parameters				
	A	B	C	D	E	F	I	C1(mm ³)	Le(mm)	Ae(mm ²)	Ve(mm ³)	Wt(g)
EFD 10	10.50±0.30	5.20±0.10	2.70±0.10	4.55±0.15	7.65±0.25	3.75±0.15	1.45±0.05	3.290	23.70	7.20	171	
EFD 12	12.5±0.30	6.20±0.10	3.50±0.10	5.40±0.15	9.00±0.25	4.55±0.15	2.00±0.10	2.500	28.50	11.40	325	
EFD 15	15.00±0.40	7.50±0.15	4.65±0.15	5.30±0.15	11.00±0.35	5.50±0.25	2.40±0.10	2.270	34.00	15.00	510	2.82
EFD 20	20.00±0.55	10.00±0.15	6.65±0.15	8.90±0.20	15.40±0.50	7.70±0.25	3.60±0.15	1.520	47.00	31.00	1460	7.28
EFD 25	25.00±0.65	12.50±0.15	9.10±0.20	11.40±0.30	18.70±0.60	9.30±0.25	5.20±0.15	0.981	56.50	57.60	3258	16.10
EFD 30	30.00±0.80	15.00±0.15	9.10±0.20	14.60±0.25	22.40±0.75	11.20±0.30	4.90±0.15	0.980	68.00	69.00	4700	

■ Electrical characteristics

CORES	AL±25%(nH/N ²)				AL±30%(nH/N ²)
	GL20	GL25	GL50	GL70	GL100
EFD 10		500			
EFD 12		700			
EFD 15		780			
EFD 20		1300			
EFD 25		2300			
EFD 30		2400			

※ AL VALUE: 10KHz, 50mv, 100TS

GAPPED CORE IS AVAILABLE, PLEASE SPECIFY WHEN ORDERING.