



EMI Suppressors Wound Beads(R6H)

1. Applications:


The wound beads (R6H) can offer a wide band to filter the EMI from the outsides.

2. Major materials:

GL3B, GL5B, GL6.

3. Ordering code:

GL5B	R6H	6 x 10 x 0.85
Material	Type	OD H

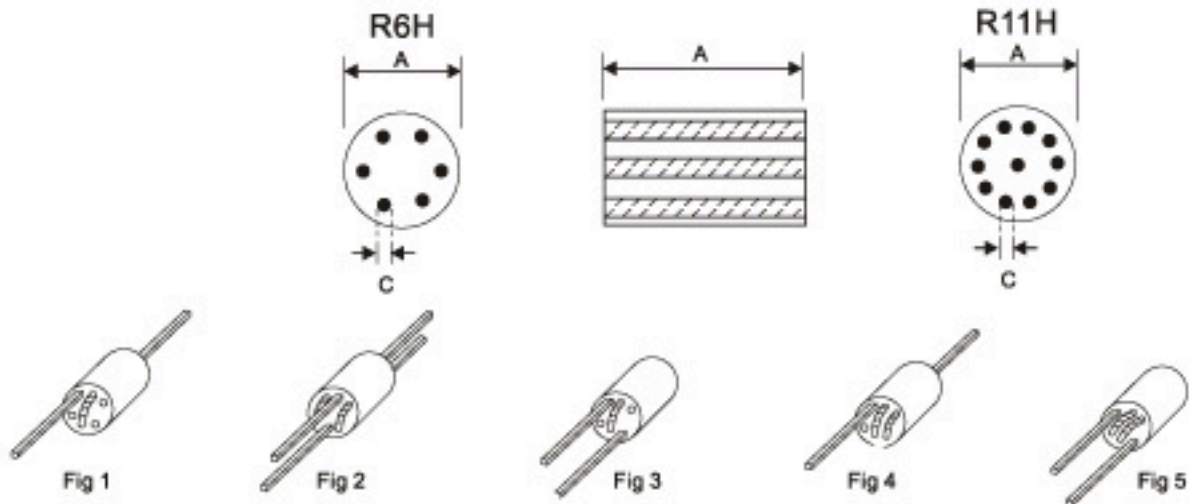

4. Dimensions

ITEM	Dimensions in mm		
	A	B	C
R6H 6x10	6.0±0.3	10.0±0.3	0.85±0.15
R11H 10x10	10.0±0.3	10.0±0.3	0.9±0.15

5. Charact (Impedance):

TURNS	GL6 R6H 6x10(Min)			GL5B R6H 6x10(Min)			FIG
	10 MHz	50 MHz	100 MHz	10 MHz	50 MHz	100 MHz	
1.5	286 OHM	435 OHM	460 OHM	190 OHM	430 OHM	530 OHM	1
2x1.5	286 OHM	435 OHM	460 OHM	190 OHM	430 OHM	530 OHM	2
2.0	320 OHM	530 OHM	480 OHM	240 OHM	520 OHM	480 OHM	3
2.5	420 OHM	750 OHM	650 OHM	320 OHM	800 OHM	700 OHM	4
3.0	550 OHM	850 OHM	650 OHM	400 OHM	900 OHM	700 OHM	5