



Coil Core Series Cup core

1. Applications:

Inductor of IFT, RF, OSC. etc.
(standard type , P2 type pair to DR core or TH core when in using.)

2. Materials:

GL9, GL5E.

3. Ordering code:

GL5E P 6.9 x 6
Material Type OD H



standard type

P2 type

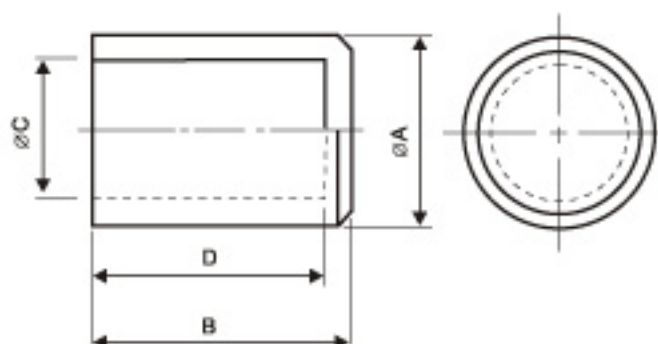


Fig 1

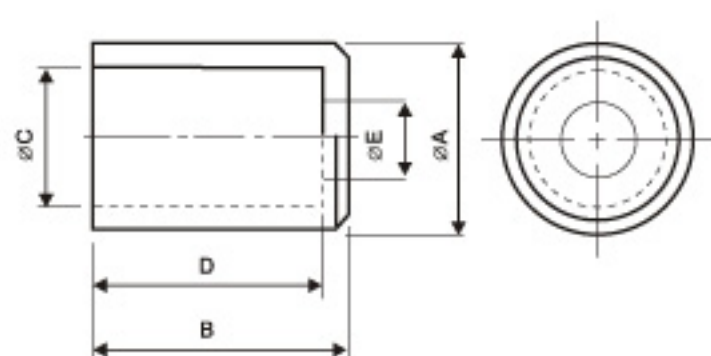


Fig 2

4. Dimensions (m/m)

ITEM	A	B	C	D	E	F	Fig
P 9.85x6.6P2	9.85 ^{+0.05} _{-0.25}	6.6±0.2	8.1 ^{+0.25} _{-0.05}	5.2±0.15	4.5 ^{+0.25} _{-0.05}		2
P 6.9x6P2	6.9 ^{+0.15} _{-0.20}	6.0±0.2	5.6±0.15	4.7 ^{+0.10} _{-0.15}	4.05 ^{+0.25} _{-0.05}		2
P 6.9x3P2	6.9 ^{+0.15} _{-0.15}	3.0±0.15	5.7 ^{+0.2} _{-0.1}	2.5±0.15	4.05 ^{+0.25} _{-0.05}		2
P 10.5x12.5	10.5±0.3	12.5±0.3	8.5 ^{+0.15} _{-0.1}	11 ^{+0.3} _{-0.2}			1
P 12.4x15	12.4±0.3	15±0.4	9.3 ^{+0.2} _{-0.1}	13 ^{+0.4} _{-0.2}			1